

Impedance Analyzer

6632

Features

- Frequency range: DC, 10Hz to 1/3/5/10/20/30MHz/50MHz
- Basic accuracy up to $\pm 0.08\%$ (typical $\pm 0.05\%$)
- Automatic Level Control (ALC)
- Output impedance 25 Ω /100 Ω , switchable
- Using with DC bias current test system
- Support meter mode and list mode, sweep mode, and equivalent circuit analysis (option) function
- Built-in DC Bias voltage $\pm 12V$
- Measurement of piezoelectric element admittance circle, and can measure DC bias characteristic of capacitance value.
- Ultra-high measuring speed < 3ms
- Open circuit/short circuit/load correction function
- Up to four parameters can be selected in the electric meter mode. The inductance and DCR values can be measured and displayed simultaneously
- Auto component classification: Comparator function and Handler BIN classification function
- Can be used with various fixtures, such as: liquid dielectric material test fixture, dielectric material test fixture and magnetic material test fixture.....etc.
- Support RS-232, GPIB, Handler, LAN, USB Host/Device interfaces
- Using in R & D department, process development and laboratory
- PC connection data analysis software is available



CE RS-232 Handler USB Host/Device GPIB LAN

Applications

Passive Components: Capacitor, Inductor, Resistor, Transformer, Ceramic resonator, Quartz Crystal

Semiconductor Components: The CV characteristics analysis of varactor diodes, Diodes

Dielectric Material: Estimation on permittivity and consumption tangent of plastic, ceramic and PCB

Other Components: Estimation of the impedance of PCB components

Accessories/Fixtures

Standard Accessories

- Power Cord
- DIP Test Fixture (FX-000C19)



Optional Accessories

- PC Link software



- F423906A
Kelvin Clip Leads
(with BNC Box)



- F423503
DIP Test Fixture



- F423504
DIP Test Fixture



- FX-0000C6
DIP Test Fixture



- F423905
SMD Test Fixture




- FX-000C10
Bottom Electrode
SMD Test Fixture



- FX-000C11
SMD Tweezer Test Leads



- FX-000C12
SMD Test Fixture



- FX-0000C7
Dielectric Material
Test Fixture




- FX-0000C8
Magnetic Material Test Fixture



- F663001 A/B/C
BNC Test Leads



- FX-0000C9
Material Testing Fixture



- FX-000C20
Liquid Dielectric
Material Test Fixture



- F420001
External Voltage
Bias($\pm 200V/1MHz$)



- F420003
External Voltage
Bias ($\pm 40V/1MHz$)



- F420005
External Voltage/
Current Bias
($\pm 40V/100mA$)



- F420006
External Voltage Bias
($\pm 2000V/1MHz$)



- FX-LR0001
Automatic Level
Compensation Fixture

Specifications ¹ S model is an optional equivalent circuit analysis function


Model Name	6632-1/1S	6632-3/3S	6632-5/5S	6632-10/10S	6632-20/20S	6632-30/30S	6632-50/50S
Test Frequency	10Hz-1MHz	10Hz-3MHz	10Hz-5MHz	10Hz-10MHz	10Hz-20MHz	10Hz-30MHz	10Hz-50MHz
Frequency Resolution	100mHz, 6 digits of setting						
Frequency Output Accuracy	±0.01%						
Basic Accuracy	±0.08% (typical ±0.05%)						
AC Drive Level	Voltage Minimum Resolution		1mV				
	Accuracy		ALC OFF: 10% of setting ±2mV				
			ALC ON: 6% of setting ±2mV				
	Test Signal Current Level		200μA-20mA _{rms}				
	Current Minimum Resolution		10μA				
	Accuracy		ALC OFF: 10% of setting ±20μA				
ALC ON: 6% of setting ±20μA							
DC Drive Level	1V (fixed)						
Output Impedance	25Ω, 100Ω (switchable)						
Test Time (Fastest)	<3ms						
Measurement Parameters and Ranges	Z		0.000mΩ-9999.99MΩ				
	R, X		±0.000mΩ-9999.99MΩ				
	Y		0.00000μS-999.999kS				
	G, B		±0.00000μS-999.999kS				
	θRAD		±0.00000-3.14159				
	θDEG		±0.000° -180.000°				
	Cs, Cp		±0.00000pF-9999.99F				
	Ls, Lp		±0.00nH-9999.99kH				
	D		0.00000-9999.99				
	Q		0.00-9999.99				
	Δ		±0.00%-9999.99%				
	Rdc		0.00mΩ-99.9999MΩ				
	εr' εr''		0-100000				
	μr' μr''		0-100000				
Bias Current Source (option)	DC Bias 6243/ 6240(320A), 6223/ 6220(120A), 6210(60A)						

General

Measurement Mode	Meter mode, list mode, sweep mode		
Measurement Circuit	Series/Parallel		
Correction	Open Circuit/Short Circuit/Load correction		
Cable Compensation	0/ 0.5/ 1/ 2 m		
List Mode	50 groups of Multi-steps setting (Each group contains up to 15 steps)		
Built-in DC Bias	-12 to +12V, 0.3% ±1.5mV, 100Hz to 50MHz		
Bin sort	9 BINs		
Comparator	ABS, ΔABS, Δ%, OFF		
Built-in Storage	100 sets LCR setting documents, 50 groups of list mode setting		
USB Host Storage	LCR setting documents, list mode setting document, BMP graphics, Sweep screen and test result data		
Trigger Test	Auto, manual, RS-232, GPIB, Handler		
Interface	RS-232, GPIB, Handler, LAN, USB Host/Device		
Option	PC link software		
	Equivalent Circuit Analysis	Three elements (4 models), four elements (3 models)	
Power Supply	Voltage 100-240Vac		
	Frequency 50-60Hz		
	Low power consumption: Maximum 30W		
Display	7.0" TFT, 800×480 color screen		
Environment	Temperature: 10-40℃, Humidity: 20-80%RH		
Dimension (W*H*D)	336×147×340mm		
Weight	3.95kg		


6632 Key Features

A Function Introduction

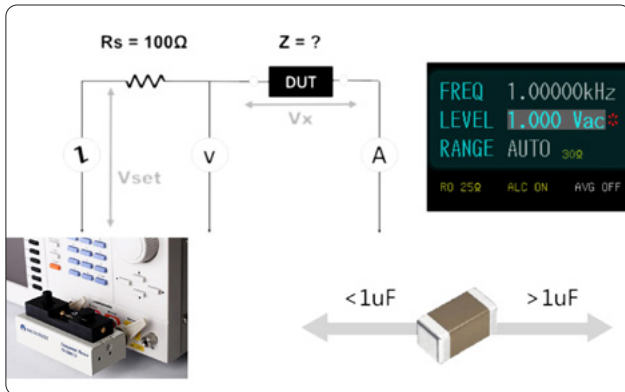

Output Impedance 25Ω/100Ω and Auto Level Control (ALC)

The key parameters for capacitance are Cs/Cp/D/Q/ESR/DC Bias Voltage.

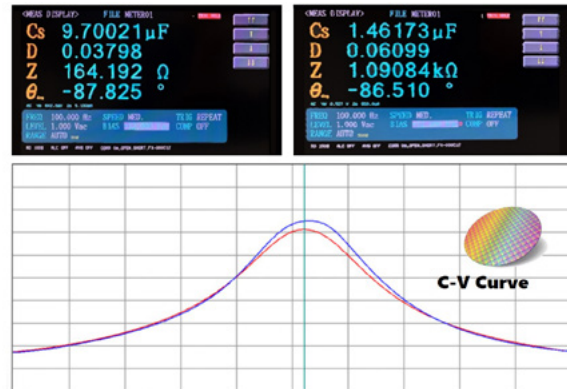

Evaluation of DC bias voltage characteristics with semiconductor wafer or ceramic multilayer capacitors

Multi-layer ceramic capacitors (MLCC) DC Bias measuring value from 9.7uF decrease to 1.46uF.





Liquid Dielectric Material Test Fixture (C20) /Dielectric Material Test Fixture (C7)

Using C20 for measuring the characteristics of electrochemical materials and using C7 or measuring PCB board or ceramic board.




Magnetic Material Test Fixture (FX-0000C8)

Using the magnetic material test fixture for measuring of permeability of various toroidal cores or ferrite cores and electromagnetic shielding coating materials, 6630 built-in formula to directly calculate the permeability coefficient value μ' , μ'' .

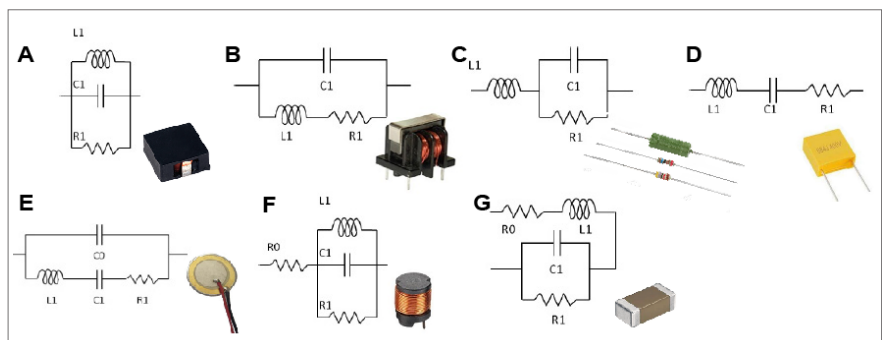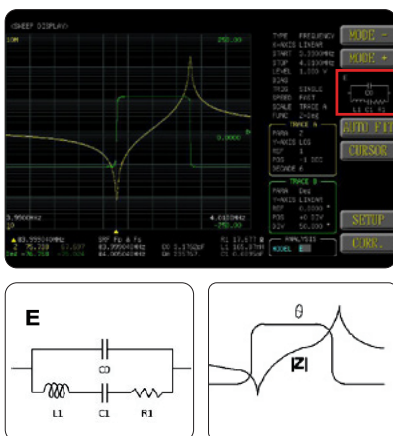

Equivalent Circuit Analysis

It has seven different models, combine with different types of parameters (R, L, C), you can see three or four elements value, and self-resonant frequency (SRF). You can simulate the impedance trace of your own equivalent circuit parameter values and then compare it with an accrual measurement trace.

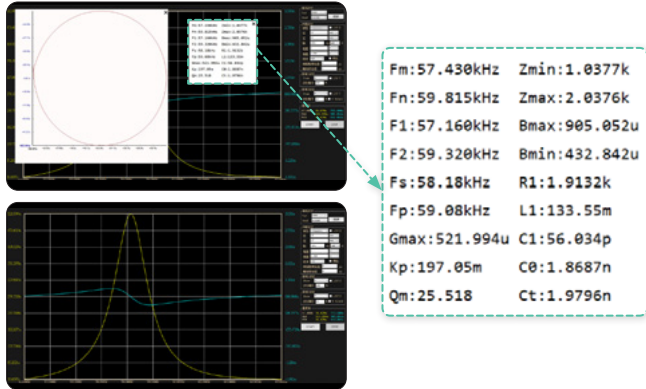

Piezoelectric element/quartz crystal analysis frequency characteristics

The key parameters for Piezoelectric element /quartz crystal are Fs/Fp/Qm/Kp (Electromechanical coupling coefficient)



Evaluation impedance characteristics of RFID/ NFC/automotive wireless of antennas

Using 6632 impedance analyzer equivalent circuit Analysis function.



Testing PC board inductance coil


The key parameters for 6632 impedance analyzer measuring PC board inductance coil are L/Q/DCR/Rs/SRF.

B Applications

Passive Component



inductance
Ls / Lp / Q / SRF / I sat / I rms




MLCC/capacitance
Cs / Cp / D / Q / ESR / DC Bias Voltage

Acoustic Components



Voice coil motor/Hearing aids
Ls / Q / Qm / SRF




Piezoelectric element / quartz crystal
Cs / Cp / D / Fs / Fp

Material



Magnetic material
 μ_r'' μ_r'



Dielectric/ceramics/ Electrochemical materials
 ϵ_r' ϵ_r''

Wireless RF/Power Supply



Wireless charging
Ls / Q / SRF / DCR / Rs




NFC/low Freq. RFID
Ls / Q / SRF / DCR / Rs



battery
ESR / Cs / Cp / D

Semiconductor Components



Wafer
C-V



LED Light board
Z / Cs / Cp / D



diode
Cs / Cp / D